

ULTRASAVE

ER254120M

Ballast Type	Electronic
Starting Method	Programmed Rapid Start
Lamp Connection	Series
Input Voltage	120 ~ 277V
Input Frequency	50 / 60Hz
Sound Rating	A
E.O.L. Protection	Yes


Electrical Specifications

Lamp Type	No. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps) @120/277V	Input Power (Watts)	Ballast Factor	Max. THD %	Power Factor	Max. L.C.C.F.	B.E.F.
54W T5	2	54	-4 / -20	0.96 / 0.42	114	1.00	10	0.99	1.50	0.88
	1			0.49 / 0.21	58					1.72
FT 55W	2	55		0.83 / 0.36	99	0.90				0.91
	1			0.45 / 0.20	54					1.67
FT 50W	2	50		0.94 / 0.41	111	1.06				0.95
	1			0.49 / 0.21	58					1.83

Regulatory Conformance

- Meets ANSI Standard C82.11-1993
- Meets ANSI Standard C62.41-1991
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)

Wiring Diagram

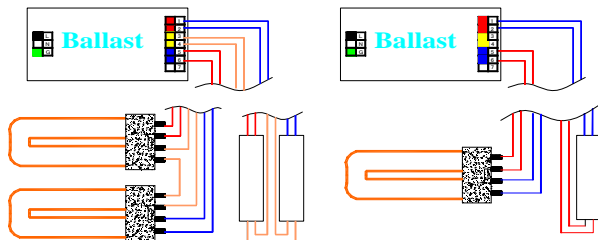

Product Dimensions



This photo is for dimensions only.

Overall (L)	Width (W)	Height (H)	Mounting (M)
12.83 "	1.32 "	1.13 "	12.52 "
12 13/16 "	1 5/16 "	1 1/8 "	12 1/2 "
32.60 cm	3.36 cm	2.86 cm	31.80 cm

Revised on 04/11/2007

Data published here are based on the result of the test under a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ULTRASAVE LIGHTING LTD.

4011 14 TH AVE. MARKHAM, ONTARIO, L3R 0Z9, CANADA

TEL: (905) 940-0888 FAX: (905) 940-0338

www.ultrasave.ca